


Portatarga – License Plate Support

PRTAK12

Smontare completamente il porta targa originale , per questa operazione è necessario smontare la sella passeggero e disconnettere il cablaggio luce targa (Fig. 1)



Avvitare la piastra di sostegno porta targa al telaietto posteriore utilizzando le viti std. precedentemente smontate e relativi profili angolari (Fig 2 e 3)
Applicare il porta targa VMC all' apposito sostegno (Fig 4)

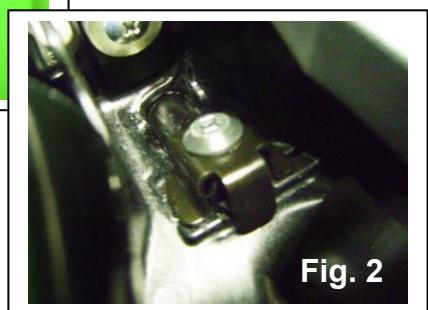

Dismount the std. license plate holder from the rear subframe, for this operation is necessary to remove the passenger seat and disconnect the license plate light wiring (Pic 1)

Fix the VMC license plate holder on subframe using the std. screws and the profiles previously removed (Pic. 2 and 3)

Bolt on the license plate support to its holder using the dedicated bolts (Pic . 4)

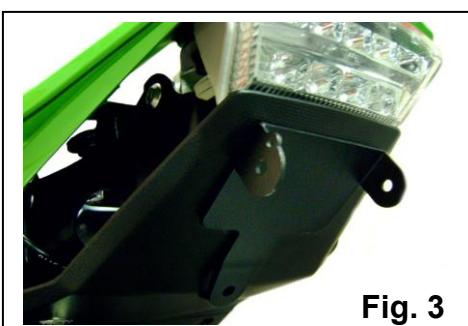


Fig. 3

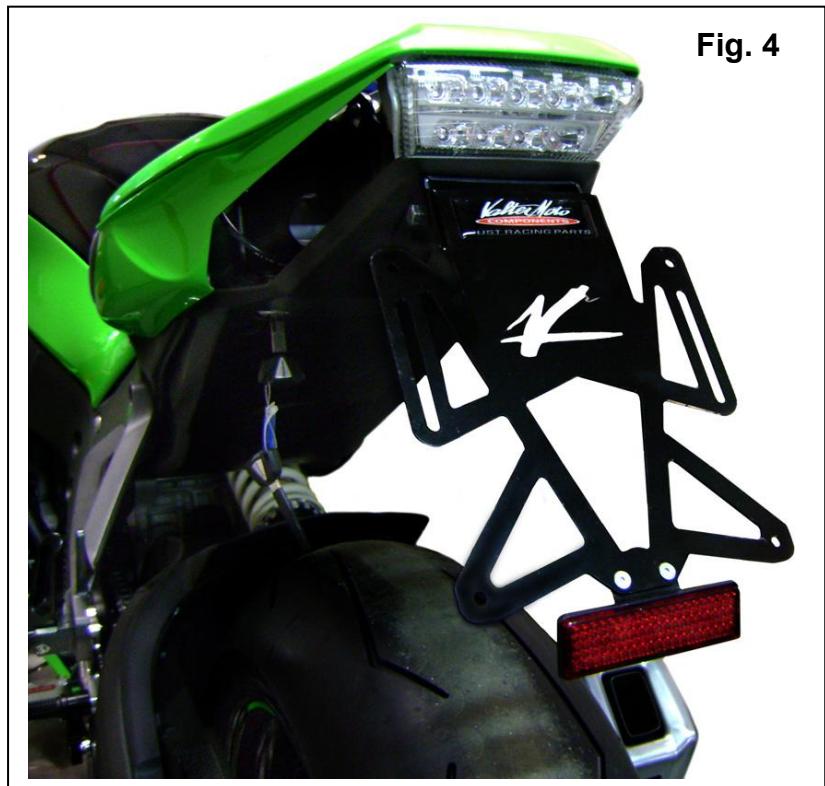


Fig. 4

Nel caso il fanale posteriore non integrasse la luce portatarga, è possibile acquistare separatamente la luce portatarga VMC disponibili in due versioni.

In case the rear light of the bike doesn't include the license plate light, there is the possibility to buy it separately, choosing from 2 VMC models:



Cod: PRTL01



Cod: PRTL02