

Portatarga – License Plate Support

PRTAS10

Smontare la sella anteriore e posteriore. Per facilitare la sconnessione del cablaggio luce targa posteriore si consiglia di rimuovere il fianco sottosella sinistro.

Svitare le 4 viti std. che fissano il porta targa /parafango post al telaio posteriore.

Avvitare le due staffe sostegno porta targa VMC al telaio post. utilizzando le 4 viti std. e le 4 rondelle in dotazione (FIG 1).

Avvitare il porta targa VMC alle relative staffe come in (FIG 2).

Dismount front and rear seats. Disconnect license light wiring (you can make an easy job if you take off left underseat fairing)

Fix VMC license plate holders by std. bolts and VMC dedicated washers(PIC 1).

Fix all the license plate support like PIC 2

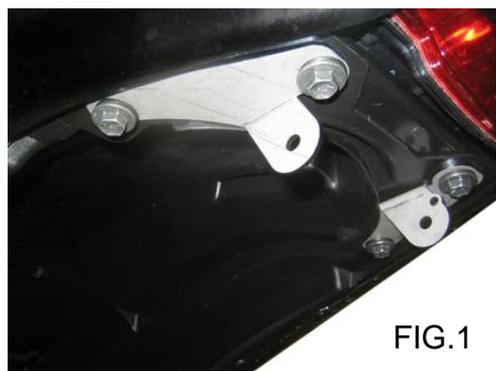


FIG.1



FIG.2

Nel caso il fanale posteriore non integrasse la luce portatarga, è possibile acquistare separatamente la luce portatarga VMC disponibili in due versioni.

In case the rear light of the bike doesn't include the license plate light, there is the possibility to buy it separately, choosing from 2 VMC models:



Cod: PRTL01



Cod: PRTL02