

Portatarga – License Plate Support

PRTAS13

- 1** Disassemblare completamente il portatarga /parafango posteriore originale, staccare il cavo e togliere la serratura sella dallo stesso da riutilizzare in fase di montaggio (fig 1)

Dismount std. license plate holder and rear mud guard , keep seat lock (Pic. 1).



FIG.1

- 2** Applicare al sotto codone la piastra di montaggioVMC come in Fig. 2(utilizzando le 2 viti TE 6x 20 e relative rondelle) . Applicare la serratura sella e il fanale posteriore alla copertura sagomata VMC . Collegare i cavi alimentazione fanale posteriore nel seguente ordine:

GIALLO = NEGATIVO
NERO = LUCE POSIZIONE
ROSSO = STOP

*Fix to subframe VMC bracket (Pic. 2) by dedicated hexagonal 6x 20 bolt and washers
Fix, seat lock and rear light to VMC cover*

Connect rear light wiring :

YELLOW = HEART
BLACK = POSITION LIGTH
RED = BRAKE LIGTH

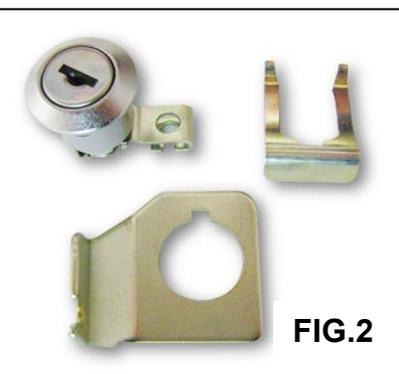


FIG.2



FIG.3

- 3** Posizionare ed avvitare tramite le 2 viti TBEI 6 x 20 il porta targa come Fig. 3

Bolt –on all by 2 6 x 20 mm. bolts to the bracket fixed before (Pic. 3).



FIG.4

- 4** Avvitare il supporto targa come in Fig 4

Fix license late holder like Pic. 4