

**Portatarga – License Plate Support**

**PRTNS13**

- 1** Disassemblare completamente il portatarga /parafango posteriore originale, staccare il cavo e togliere la serratura sella dallo stesso da riutilizzare in fase di montaggio ( fig 1)

*Dismount std. license plate holder and rear mud guard , keep seat lock ( Pic. 1).*



**FIG.1**


- 2** Applicare al sotto codone la piastra di montaggioVMC come in Fig. 2( utilizzando le 2 viti TE 6x 20 e relative rondelle) . Applicare la serratura sella e il fanale posteriore alla copertura sagomata VMC . Collegare i cavi alimentazione fanale posteriore nel seguente ordine:

GIALLO = NEGATIVO  
NERO = LUCE POSIZIONE  
ROSSO = STOP

*Fix to subframe VMC bracket ( Pic. 2) by dedicated hexagonal 6x 20 bolt and washers  
Fix, seat lock and rear light to VMC cover*

*Connect rear light wiring :*

YELLOW = HEART  
BLACK = POSITION LIGTH  
RED = BRAKE LIGTH

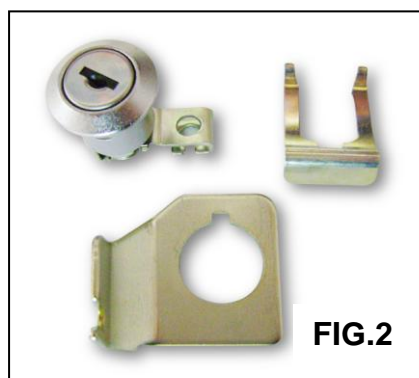


**FIG.2**



**FIG.3**

- 3** Posizionare ed avvitare tramite le 2 viti TBEI 6 x 20 il porta targa come Fig. 3

*Bolt –on all by 2 6 x 20 mm. bolts to the bracket fixed before ( Pic. 3).*

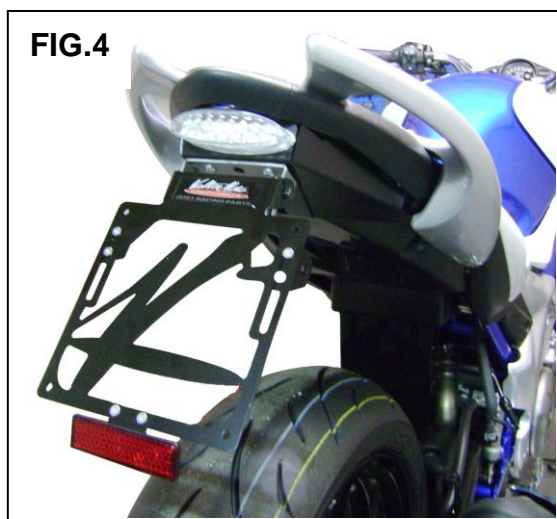

**FIG.4**

- 4** Avvitare il supporto targa come in Fig 4

*Fix license late holder like Pic. 4*